


FLUTE VISUAL INSPECTION



CHECK:

- For missing or damaged (worn) pads
- That all pads are covering (seating) properly
- That all mechanical combinations operate properly
- For missing, unhooked, or maladjusted springs
- For missing, damaged, or maladjusted corks and felts
- For excessive lateral key movement between posts or adjacent keys
- For missing or maladjusted pivot screws
- For missing or maladjusted adjustment screws (combinations)
- For corroded steels (long screws) or pivot screws
- For sluggish key action due to misaligned body posts
- For sluggish keys due to bent screws, pivot screw pilots, or key hinge tubing
- For oil and dirt accumulation on the body and key mechanism
- For sluggish keys due to bent screws, pivot screw pilots, or key hinge tubing
- Body sections for cracks or checks (wood-bodied instruments only)
- For bent or damaged tone holes
- Continuity on soldered or brazed tone holes
- For significant body dents
- Key alignment
- For body alignment
- For damaged or improperly fit tenons (especially the foot joint)
- For lost motion in the key mechanism
- That the rollers are free and operational
- For sticky pads
- For correct key opening (travel)
- That all bearing surfaces (pivot points and hinge tubes) are well lubricated
- For the accumulation of residue in the bore
- For the accumulation of residue in the tone holes
- The embouchure hole for blemishes, dents, or accumulation of residue
- For a loose or missing head joint crown
- The head joint cork adjustment (secure and in the correct place)
- The instrument's case for insecure blocking
- The instrument's case for broken or malfunctioning latches or hinges
- The instrument's case for loose articles which may damage the instrument

FLUTE INSPECTION SHEET

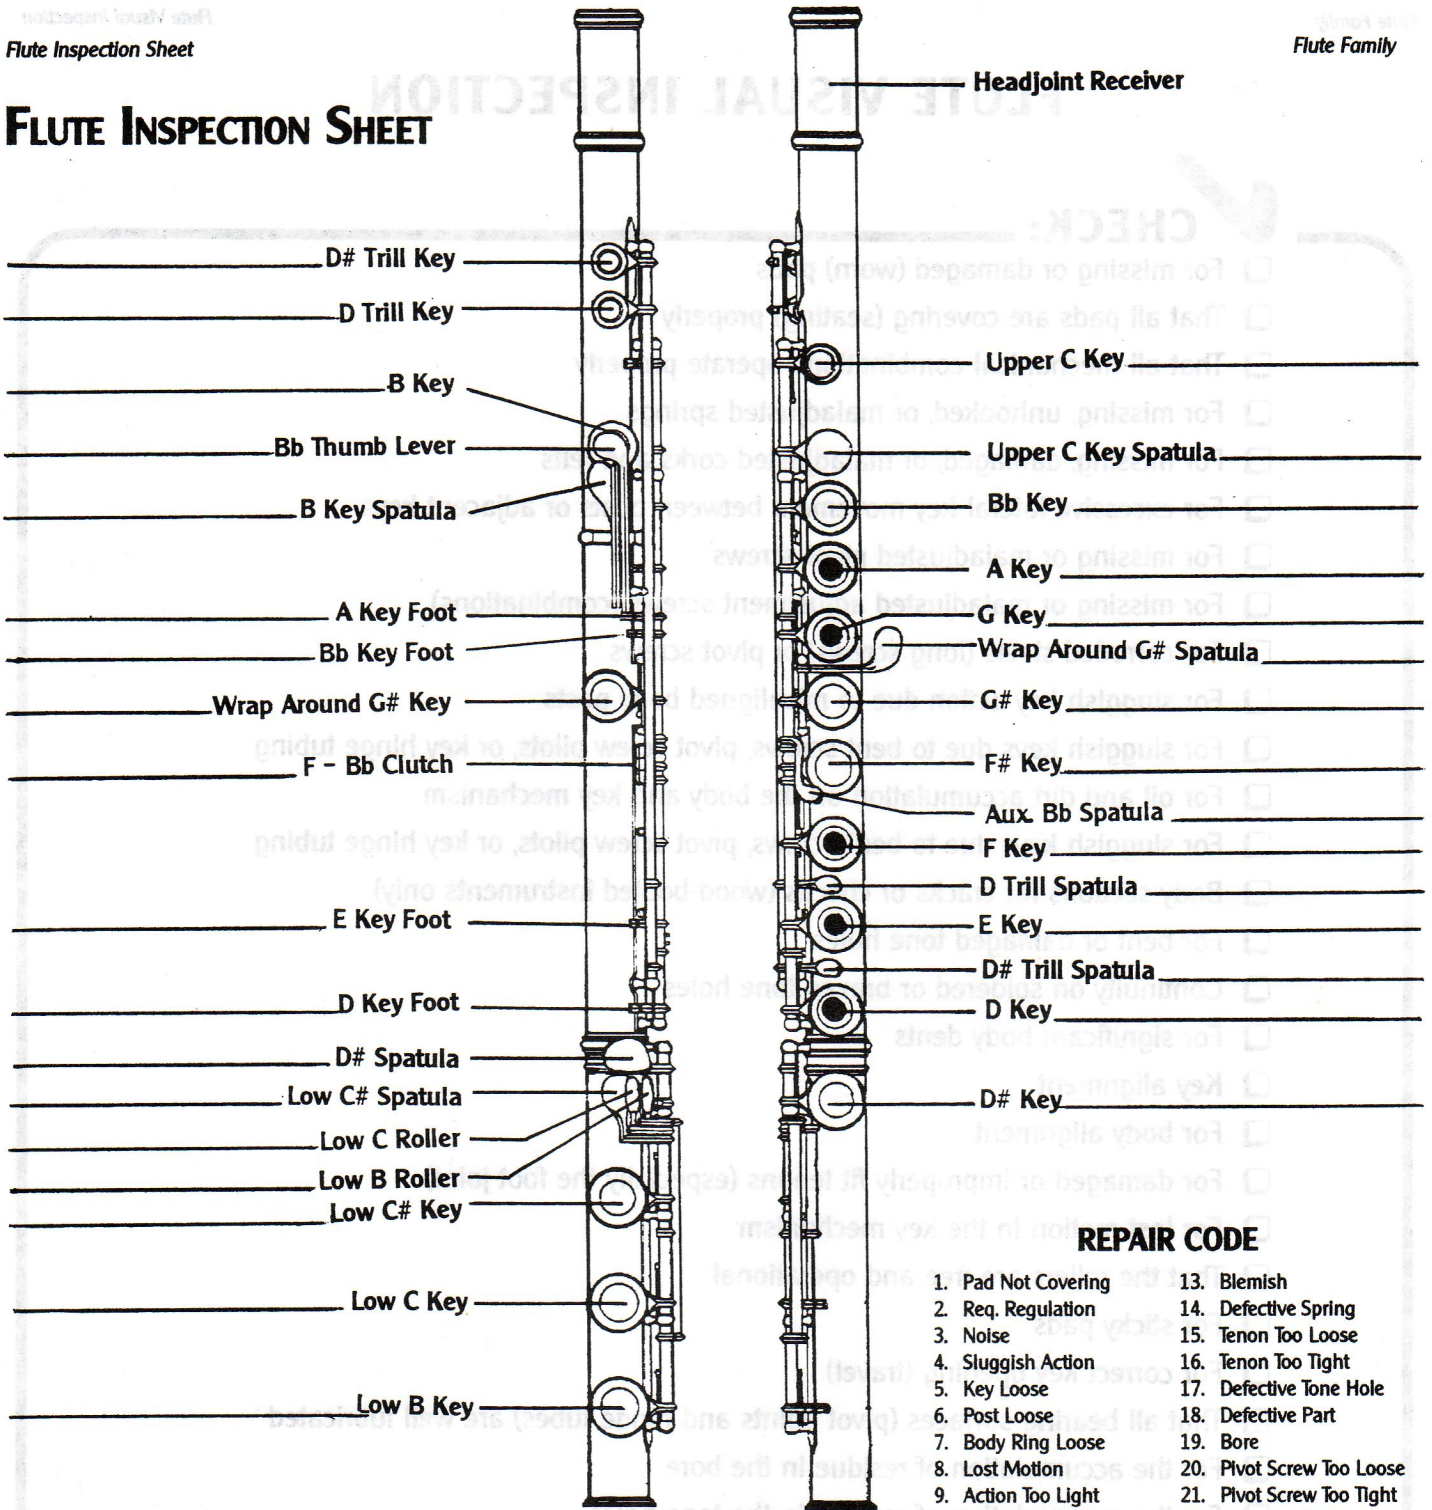

REPAIR CODE

- | | |
|----------------------|----------------------------|
| 1. Pad Not Covering | 13. Blemish |
| 2. Req. Regulation | 14. Defective Spring |
| 3. Noise | 15. Tenon Too Loose |
| 4. Sluggish Action | 16. Tenon Too Tight |
| 5. Key Loose | 17. Defective Tone Hole |
| 6. Post Loose | 18. Defective Part |
| 7. Body Ring Loose | 19. Bore |
| 8. Lost Motion | 20. Pivot Screw Too Loose |
| 9. Action Too Light | 21. Pivot Screw Too Tight |
| 10. Action Too Stiff | 22. Defective Pad |
| 11. Action Too Open | 23. Defective Cork or Felt |
| 12. Action Too Close | 24. Body Crack |

Date: _____
 Owner: _____
 Telephone: _____
 Inspected by: _____
 Manufacturer: _____
 Model: _____
 Serial No. _____
 Cost Estimate: _____

Comments: _____

